

PRESTIGE

T&G ENGINEERED OAK

160 x 12/3mm



PRESTIGE

T&G ENGINEERED OAK

Features & Benefits

Grade ABCD, Janka 5.5 – 6.0kN

T&G profile.

Micro bevel 4 sides.

Set length with nested shorts.

Light brushed surface.

VOC free, water based matte coating.

Australian fire & slip test certified.

Suitable for in-slab hydronic heating.



RESIDENTIAL
LIGHT
COMMERCIAL



SLIP
RESISTANCE



FIRE TEST
CERTIFIED




LOW EMISSIONS



HYGIENIC &
EASY TO CLEAN



TOUGH &
DURABLE



SCRATCH
RESISTANT



T&G JOINING
SYSTEM




PRODUCT DETAILS

PRODUCT:	Prestige engineered oak 12mm plank
SURFACE FINISH:	Light brushed surface, PU matte coating
PROFILE:	T&G for direct stick or floating install, V4
SIZE:	1900 x 160 x 12/3mm inc. nested shorts
PACK QUANTITY:	1.824m ² / carton



BONDI

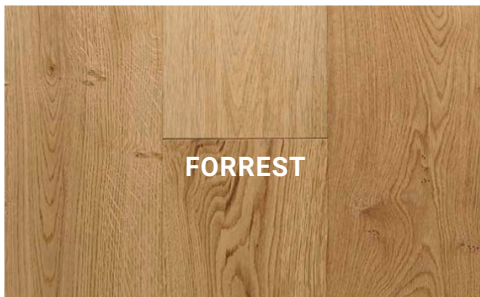


FORREST




ONYX



PICCOLO

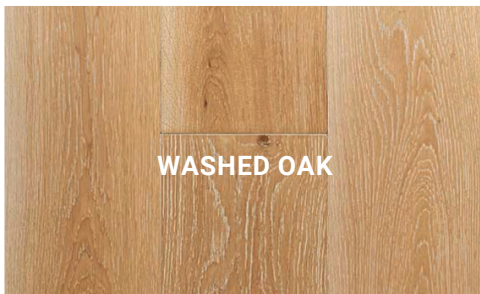

WASHED OAK

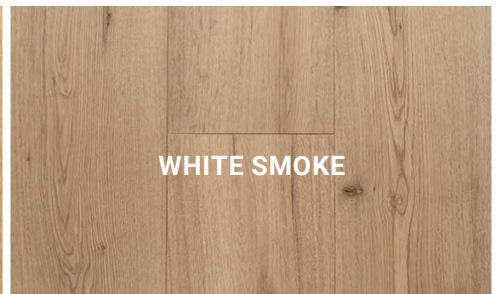

WHITE SMOKE